

KEY FEATURES


- > Low voltage piezo ceramic
- > Optimal preload for high dynamics
- > Mechanical Amplification
- > Compact Size
- > High Resolution

RELATED PRODUCTS

- > CTEC benchtop controllers
- > CTEC OEM controllers

AVAILABLE OPTIONS

- > SG sensor
- > Vacuum compatibility

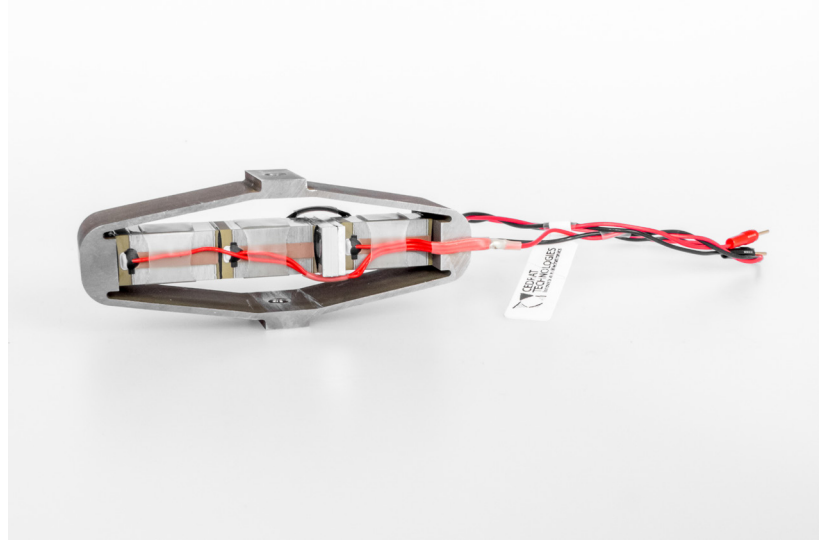

NON CONTRACTUAL PICTURE

| PARAMETER | VALUE | UNIT |
|---------------------------------------------------|-------------|------|
| > Quasistatic performances | | |
| Nominal Stroke | 300 | µm |
| Min stroke | 270 | µm |
| Resolution ⁽¹⁾ | 17 | nm |
| Blocked force | 540 | N |
| Stiffness | 1.8 | N/µm |
| > Dynamic performances | | |
| Resonance frequency (free-free) ⁽²⁾ | 3 100 | Hz |
| Resonance frequency (blocked-free) ⁽³⁾ | 760 | Hz |
| Force limit ⁽⁴⁾ | 340 | N |
| > Control & driving | | |
| Voltage range | -20 ... 150 | V |
| Capacitance ⁽⁵⁾ | 13 | µF |
| > Dimensions & interfaces | | |
| Height | 30 | mm |
| Length | 79 | mm |
| Width incl wires | 23 | mm |
| Mass | 110 | g |
| > Standard mechanical interfaces | See ICD | |
| > Electrical interface | See ICD | |

ANNOTATIONS

(1) Quasistatic excitation. With standard LA75 range amplifier. SNR=85dB computed as RMS output signal /RMS output Noise floor at [0;200Hz]

(2) Free-free: The actuator mounts are free

(3) Blocked-free: The actuator is fixed to a mechanical support assumed infinitely stiff

(4) Maximum pulling or pushing external force, valid up to 90% of the blocked-free resonance frequency of the actuator

(5) Capacitance +/- 20%, at 1 V RMS, low frequency, without load

