


## > CTEC: COMPACT, DYNAMIC, PRECISE

Dynamic conditions are particularly challenging! They require systems capable of generating or handling large accelerations. Reactivity and reliability of actuators developed by CTEC make them unique for high dynamic applications. However integration and loading conditions being equally important, we invite you to get in touch with our engineers at [actuator@cedrat-tec.com](mailto:actuator@cedrat-tec.com) to discuss your application.

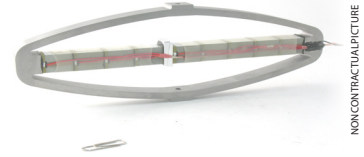

NON CONTRACTUAL PICTURE

## > TABLE OF STANDARD PROPERTIES OF USE AND MEASUREMENT

The properties defined in the table below, are set up according to the technical conditions of use and measurement. These properties are warranted within their variation range and in compliance with the standard technical conditions of use.

PROPERTIES	STANDARD TECHNICAL CONDITIONS	UNIT	NOMINAL VALUES	MIN. VALUES	MAX. VALUES
Notes		-	-	-	-
Max. no load displacement	Quasistatic excitation, blocked-free	μm	601	481	709
Blocked force	Quasistatic excitation, blocked-free	N	1100.0	935.0	1265.0
Stiffness	Quasistatic excitation, blocked-free	N/μm	1.831	1.465	2.01
Resonance frequency (free-free)	Harmonic excitation, free-free, on the admittance curve	Hz	1457	1238	1603
Response time (free-free)		ms	0.34	0.31	0.39
Resonance frequency (blocked-free)	Harmonic excitation, blocked-free, on the admittance curve	Hz	345	293	380
Response time (blocked-free)		ms	1.45	1.30	1.67
Capacitance	Quasistatic excitation, free-free, on the admittance curve	μF	110.00	99.00	143.00
Max. no load displacement at resonance	Max. harmonic excitation, free-free	μm p-p	541	433	649
Max. voltage at resonance	Max. harmonic excitation, free-free	Vrms	9.00	7.20	10.80
Force limit (0-pk)	Max. harmonic excitation, free-free	N	632.50	506.00	695.75
Resolution	Quasistatic excitation	nm	6	-	-
Height (in actuation direction)		mm	82.00	81.90	82.10
Length		mm	214.30	214.20	214.40
Width (excl. wedge & wires)		mm	15.00	14.95	15.05
Width (incl. wedge & wires)		mm	24.50	23.50	26.00
Mass		g	650.0	-	-
Standard mechanical interface	2 flat surfaces 15*15 mm <sup>2</sup> with M5 threaded hole	-	-	-	-
Standard electrical interface	2 PTFE insulated AWG26 wires 300 mm long with Ø 1 banana plug	-	-	-	-

## > PROPERTIES STANDARD TECHNICAL CONDITIONS OF USE AND MEASUREMENT

Free-free :	The actuator is not fixed
Blocked-free :	The actuator is fixed to a mechanical support assumed infinitely stiff
Quasistatic excitation :	AC voltage between -20 and 150 V at 1 Hz
Harmonic excitation :	Voltage of 0.5 Vrms, sinusoidal mode from 0 to 100 kHz
Max. harmonic excitation :	Voltage defined by the measurement of max. displacement, sinus at resonance frequency
Displacement measurement :	Laser interferometer, capacitive displacement sensor
Admittance measurement :	HP 4194 A or Cypher C60 electrical impedance analyser
Environment :	Ambient temperature (15-25°C) and dry air (Humidity < 50 % rH)

Any technical conditions of use, different from those defined above, can lead to temporary or definitive alterations of properties. Thank you to contact CEDRAT TECHNOLOGIES before using actuators under non standard technical conditions.

## > FACTORY TESTS CARRIED OUT

- Test 1 : Electrical admittance vs. Frequency, free-free
- Test 2 : Displacement vs. input voltage

## > OPTIONAL EXTRA FACTORY TESTS

- Test 3 : Gain and linearity of the sensor
- Test 4 : Step response in closed loop
- Test 5 : Stability in closed loop


## > OPTIONAL MECHANICAL INTERFACE

- [FI] Flat Interface
- [FF] Free-free Interface
- [H] Flat Interface with hole
- [SI] Specific interface
- [TH] Flat Interface with threaded hole

## > AVAILABLE OPTIONS

- [SG] Strain gauges
- [NM] Non-magnetic
- [ECS] Eddy current displacement sensor
- [VAC] Vacuum
- [SV] Specific version / Customization

> 2D CONFIGURATION

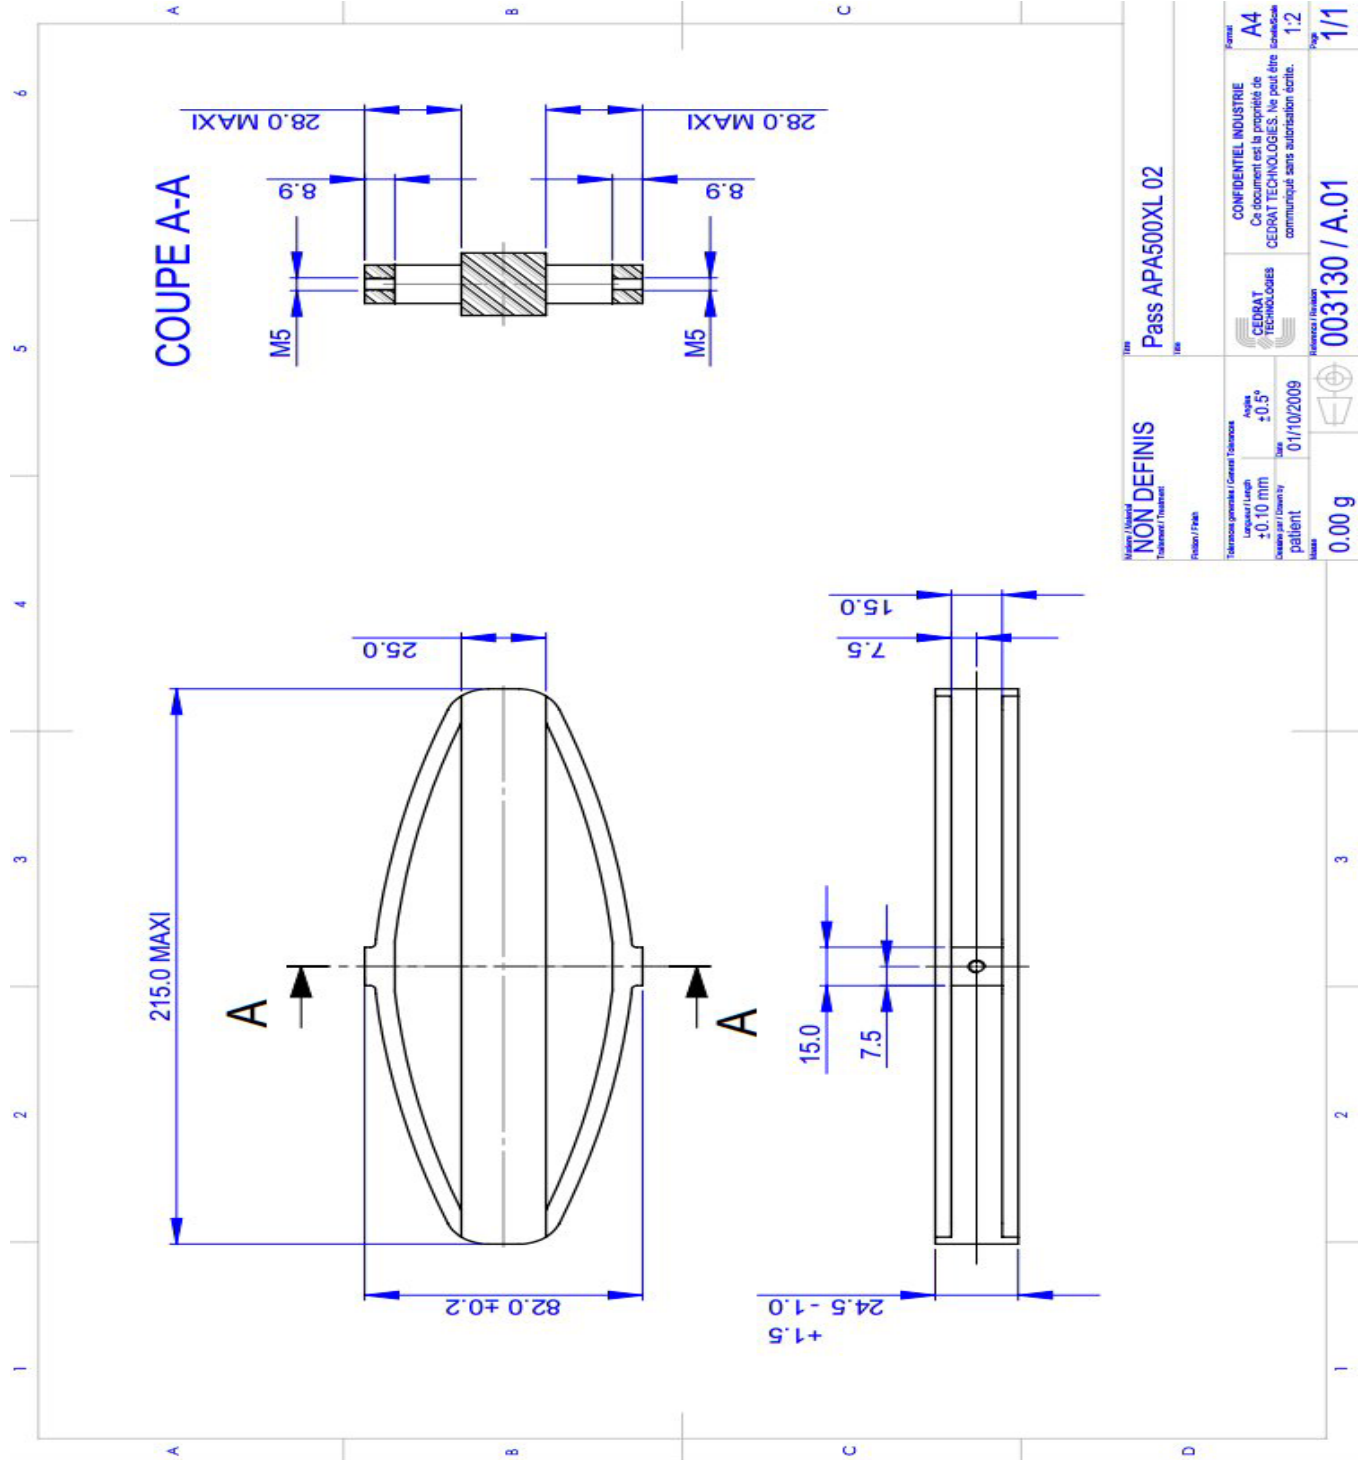

Matériau / Matière NON DEFINIS	Forme / Form Pass APA500XL 02	Formet A4
État / State NON DEFINIS	Confidentialité / Confidentiality CONFIDENTIEL INDUSTRIE	Version / Version 1.2
Précision / Precision ±0.10 mm	Propriété / Property Ce document est la propriété de CEDRAT TECHNOLOGIES. Ne peut être communiqué sans autorisation écrite.	Page / Page 1/1
Angle / Angle ±0.5°	Logo / Logo CEDRAT TECHNOLOGIES	
Expire / Expiry 01/10/2009	Reference / Reference 003130 / A.01	
Mass / Mass 0.00 g		